



SCAN FOR
MORE INFO



LSKZU2



Let's make it better together

Surface mounted
sliding gate lock

500 K CYCLES

STAINLESS MATERIAL


PREMIUM QUALITY



Find out more: locinoxusa.com | help@locinoxusa.com



SCAN FOR
MORE INFO

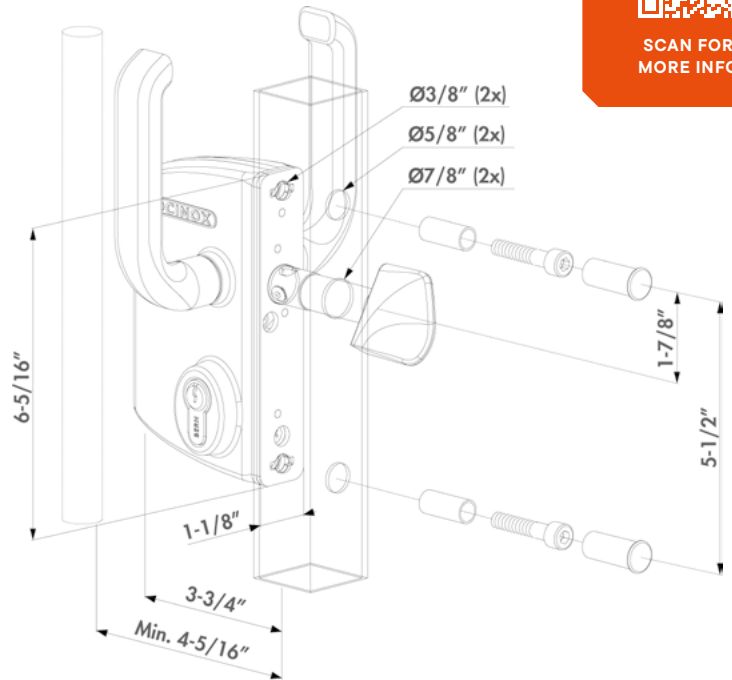

LOCINOX®

LSKZU2

Surface mounted sliding gate lock

Slide gate lock for manual sliding gates with aluminum housing and stainless steel mechanism. The key is used to override the lever action and secure the gate. The unique Twistfinger catch bolt and self-correcting keep ensures latching of your sliding gate. Catch bolts are available to fit gate frame profiles from 1-1/2" to 5" wide. Works with cantilever gate systems or fixed roller systems.



Specifications

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Chassis, mechanism and Twistfinger in stainless steel
- Adjustable for horizontal or vertical mounting of the keep (catch bolt)
- Fixing with 2 hexagon socket head screws
- Innovative closing system
- Stainless steel collar around the Twistfinger prevents cutting through the Twistfinger (catch bolt)
- Standard with reinforced aluminium handle pair
- 3006S: Square 10 mm shaft (appx 5/16")